

FLOS

Arrangements Small Canopy, Black, MAX 70W - Specification Sheet by Michael Anastassiades, 2017

Mounting	Suspension
Environment	Indoor - Dry Location
Dimming	0-10V
Finish	Black

Technical and Product Description Arrangements is a modular system of geometric light elements that can be combined in different ways, creating multiple compositions into individual chandeliers. Each unit simply attaches onto the previous one as if resting, balancing perfectly as a part of a glowing chain.

Please note that the maximum power is 190 watts. You can choose any combination with the caveat that there can only be one 'line' or 'broken line' and when you attach it, it must go at the bottom.

The ceiling canopy is available in two sizes. The first size is Max 70 watts and the second is 190 watts. The appropriate canopy is automatically configured based on your fixture design.

Please use the configurator to build your own custom creation.

Inspiration behind the design:


"I have always been fascinated with the parallel that exists between Lighting and Jewelry. Starting from the simple fact of how each piece relates to human scale: one is designed to be worn on the body whereas the other is made to decorate the space someone occupies. I'm challenged in how the delicate nature of something small can be translated spatially and still manages to retain its preciousness in the way materials are presented. It is no coincidence that the word "pendant" has a double meaning. Existing both as a piece of jewelry that hangs from a chain worn around the neck, and a light designed to hang from the ceiling." Michael Anastassiades

Electrical

Voltage	120-277
IP Rating	IP20


Physical

Cord Length (inches)	98.42"
Construction Material	Aluminium mounting brackets, Iron painted
Weight	2.76 lbs

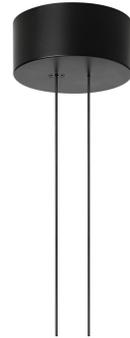

● FU041630 Black

Dimensional Image

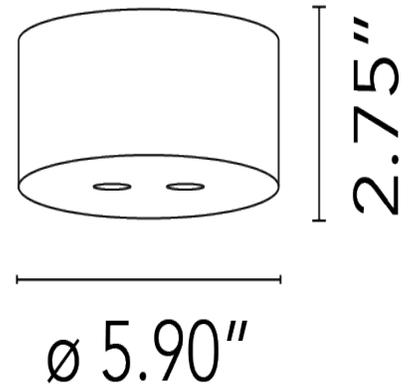

Certifications



FLOS

Arrangements Big Canopy, Black MAX 190W - Specification Sheet by Michael Anastassiades, 2017

Mounting	Suspension
Environment	Indoor - Dry Location
Dimming	0-10V
Finish	Black

Technical and Product Description Arrangements is a modular system of geometric light elements that can be combined in different ways, creating multiple compositions into individual chandeliers. Each unit simply attaches onto the previous one as if resting, balancing perfectly as a part of a glowing chain.

Please note that the maximum power is 190 watts. You can choose any combination with the caveat that there can only be one 'line' or 'broken line' and when you attach it, it must go at the bottom.

The ceiling canopy is available in two sizes. The first size is Max 70 watts and the second is 190 watts. The appropriate canopy is automatically configured based on your fixture design.

Please use the configurator to build your own custom creation [Click here](#).

The following are the only compatible dimmers (not included)

1. 0-10V Wall dimmer - Crestron - CLW-DIMFLVEX-P-A-S

2. 0-10V interface and Module

- Lutron RF Dimming Module - LMJ-5T-DV-B

- Lutron Vive PowPak - RMJS-8T-DV-B

- Lutron GRX-TVM2

- Crestron DIN-A08

- Crestron GL-CAEN-2DIMFLV8


- Crestron CLX-2DIMFLV8

C. Other manufacturers

- Client must consult with manufacturers if Interface or Module provides Sourcing current.


3. Wireless 0-10V

Casambi - CBU-ADSR and LV004-12-UNV2D

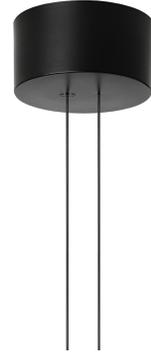

● FU041530 Black

Dimensional Image

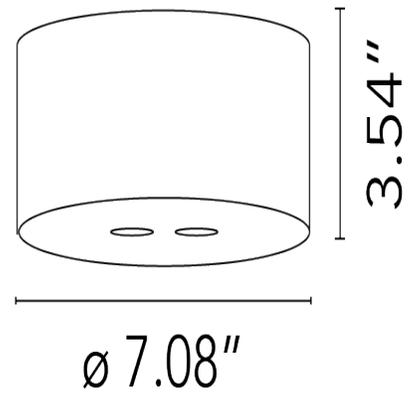

Certifications



Electrical

Voltage	100-240V
IP Rating	IP20

Physical

Cord Length (inches)	98.42"
Construction Material	Aluminium mounting brackets, Iron painted
Weight	6.39 lbs



FLOS

Arrangements Broken Line - Specification Sheet by Michael Anastassiades, 2017

Mounting	Suspension
Lamp (Bulb) Description	24W LED custom 2700K CRI90 1200lm delivered
Environment	Indoor - Dry Location
Dimming	Active 0-10V/DALI/Push Button
Finish	Black
Technical and Product Description	Arrangements is a modular system of geometric light elements that can be combined in different ways, creating multiple compositions into individual chandeliers. Each unit simply attaches onto the previous one as if resting, balancing perfectly as a part of a glowing chain.

Please note that the maximum power is 190 watts. You can choose any combination with the caveat that there can only be one 'line' or 'broken line' and when you attach it, it must go at the bottom.

The ceiling canopy is available in two sizes. The first size is Max 70 watts and the second is 190 watts. The appropriate canopy is automatically configured based on your fixture design.

Please use the configurator to build your own custom creation [Click here](#).

The following are the only compatible dimmers (not included)

1. 0-10V Wall dimmer - Crestron - CLW-DIMFLVEX-P-A-S

2. 0-10V interface and Module

- Lutron RF Dimming Module - LMJ-5T-DV-B

- Lutron Vive PowPak - RMJS-8T-DV-B

- Lutron GRX-TVM2

- Crestron DIN-A08

- Crestron GL-CAEN-2DIMFLV8


- Crestron CLX-2DIMFLV8

C. Other manufacturers

- Client must consult with manufacturers if Interface or Module provides Sourcing current.


3. Wireless 0-10V

Casambi - CBU-ADSR and LV004-12-UNV2D

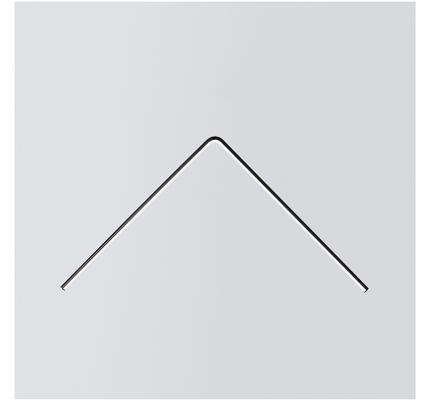

● F0405030 Black

Dimensional Image

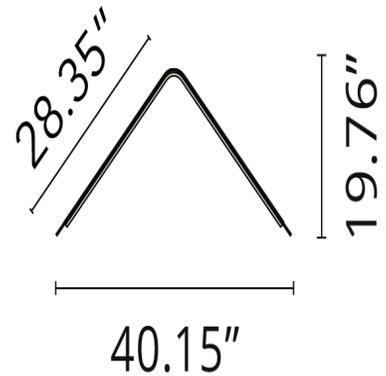

Certifications



Electrical

Voltage 48VDC

IP Rating IP20

Physical

Cord Length (inches) 98.42"

Construction Material Aluminium, Silicone, Polycarbonate

Weight 1.10 lbs



FLOS

Arrangements Drop Down - Specification Sheet

by Michael Anastassiades, 2017

Mounting	Suspension
Lamp (Bulb) Description	30W LED custom 2700K CRI90 1530lm delivered
Environment	Indoor - Dry Location
Dimming	Active 0-10V/DALI/Push Button
Finish	Black
Technical and Product Description	Arrangements is a modular system of geometric light elements that can be combined in different ways, creating multiple compositions into individual chandeliers. Each unit simply attaches onto the previous one as if resting, balancing perfectly as a part of a glowing chain.

Please note that the maximum power is 190 watts. You can choose any combination with the caveat that there can only be one 'line' or 'broken line' and when you attach it, it must go at the bottom.

The ceiling canopy is available in two sizes. The first size is Max 70 watts and the second is 190 watts. The appropriate canopy is automatically configured based on your fixture design.

Please use the configurator to build your own custom creation [Click here](#).

The following are the only compatible dimmers (not included)

1. 0-10V Wall dimmer - Crestron - CLW-DIMFLVEX-P-A-S

2. 0-10V interface and Module

- Lutron RF Dimming Module - LMJ-5T-DV-B

- Lutron Vive PowPak - RMJS-8T-DV-B

- Lutron GRX-TVM2

- Crestron DIN-A08

- Crestron GL-CAEN-2DIMFLV8


- Crestron CLX-2DIMFLV8

C. Other manufacturers

- Client must consult with manufacturers if Interface or Module provides Sourcing current.


3. Wireless 0-10V

Casambi - CBU-ADSR and LV004-12-UNV2D

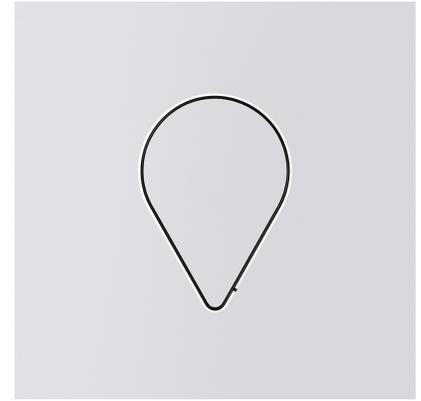

● F0413030 Black

Dimensional Image

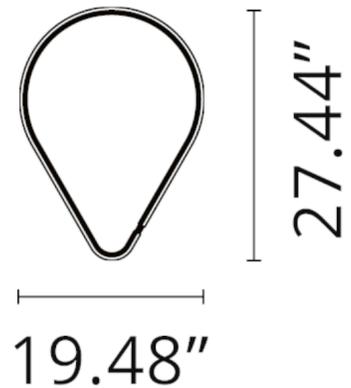

Certifications



Electrical

Voltage 48VDC

IP Rating IP20

Physical

Cord Length (inches) 98.42"

Construction Material Aluminium, Silicone, Polycarbonate

Weight 1.43 lbs



FLOS

Arrangements Drop Up - Specification Sheet by Michael Anastassiades, 2017

Mounting	Suspension
Lamp (Bulb) Description	32W LED custom 2700K CRI90 1530lm delivered
Environment	Indoor - Dry Location
Dimming	Active 0-10V/DALI/Push Button
Finish	Black
Technical and Product Description	Arrangements is a modular system of geometric light elements that can be combined in different ways, creating multiple compositions into individual chandeliers. Each unit simply attaches onto the previous one as if resting, balancing perfectly as a part of a glowing chain.

Please note that the maximum power is 190 watts. You can choose any combination with the caveat that there can only be one 'line' or 'broken line' and when you attach it, it must go at the bottom.

The ceiling canopy is available in two sizes. The first size is Max 70 watts and the second is 190 watts. The appropriate canopy is automatically configured based on your fixture design.

Please use the configurator to build your own custom creation [Click here](#).

The following are the only compatible dimmers (not included)

1. 0-10V Wall dimmer - Crestron - CLW-DIMFLVEX-P-A-S

2. 0-10V interface and Module

- Lutron RF Dimming Module - LMJ-5T-DV-B

- Lutron Vive PowPak - RMJS-8T-DV-B

- Lutron GRX-TVM2

- Crestron DIN-A08

- Crestron GL-CAEN-2DIMFLV8


- Crestron CLX-2DIMFLV8

C. Other manufacturers

- Client must consult with manufacturers if Interface or Module provides Sourcing current.


3. Wireless 0-10V

Casambi - CBU-ADSR and LV004-12-UNV2D

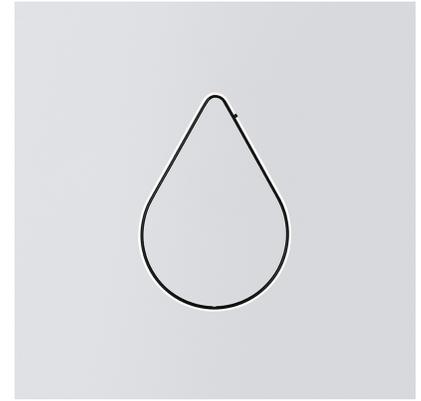

● F0414030 Black

Dimensional Image

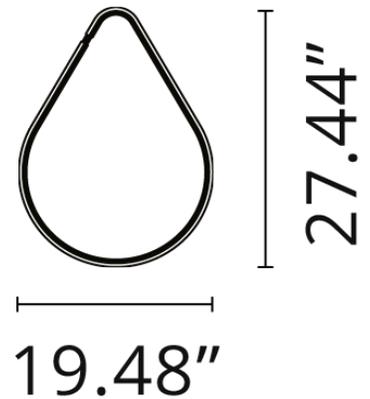

Certifications



Electrical

Voltage 48VDC

IP Rating IP20

Physical

Cord Length (inches) 98.42"

Construction Material Aluminium, Silicone, Polycarbonate

Weight 1.43 lbs



FLOS

Arrangements Line - Specification Sheet by Michael Anastassiades, 2017

Mounting	Suspension
Lamp (Bulb) Description	29W LED custom 2700K CRI90 1480lm delivered
Environment	Indoor - Dry Location
Dimming	Active 0-10V/DALI/Push Button
Finish	Black
Technical and Product Description	Arrangements is a modular system of geometric light elements that can be combined in different ways, creating multiple compositions into individual chandeliers. Each unit simply attaches onto the previous one as if resting, balancing perfectly as a part of a glowing chain.

Please note that the maximum power is 190 watts. You can choose any combination with the caveat that there can only be one 'line' or 'broken line' and when you attach it, it must go at the bottom.

The ceiling canopy is available in two sizes. The first size is Max 70 watts and the second is 190 watts. The appropriate canopy is automatically configured based on your fixture design.

Please use the configurator to build your own custom creation [Click here](#).

The following are the only compatible dimmers (not included)

1. 0-10V Wall dimmer - Crestron - CLW-DIMFLVEX-P-A-S

2. 0-10V interface and Module

- Lutron RF Dimming Module - LMJ-5T-DV-B

- Lutron Vive PowPak - RMJS-8T-DV-B

- Lutron GRX-TVM2

- Crestron DIN-A08

- Crestron GL-CAEN-2DIMFLV8

- Crestron CLX-2DIMFLV8

C. Other manufacturers

- Client must consult with manufacturers if Interface or Module provides Sourcing current.

3. Wireless 0-10V

Casambi - CBU-ADSR and LV004-12-UNV2D

Electrical

Voltage 48VDC


IP Rating IP20

Physical

Cord Length (inches) 98.42"

Construction Material Aluminium, Silicone, Polycarbonate

Weight 1.32 lbs

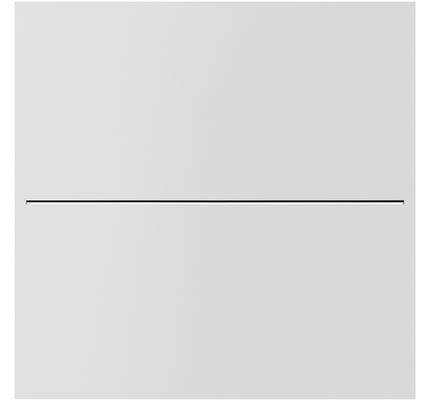

● F0401030 Black

Dimensional Image

67.16"

Certifications



FLOS

Arrangements Square Large - Specification Sheet

by Michael Anastassiades, 2017

Mounting	Suspension
Lamp (Bulb) Description	34W LED custom 2700K CRI90 1657lm delivered
Environment	Indoor - Dry Location
Dimming	Active 0-10V/DALI/Push Button
Finish	Black
Technical and Product Description	Arrangements is a modular system of geometric light elements that can be combined in different ways, creating multiple compositions into individual chandeliers. Each unit simply attaches onto the previous one as if resting, balancing perfectly as a part of a glowing chain.

Please note that the maximum power is 190 watts. You can choose any combination with the caveat that there can only be one 'line' or 'broken line' and when you attach it, it must go at the bottom.

The ceiling canopy is available in two sizes. The first size is Max 70 watts and the second is 190 watts. The appropriate canopy is automatically configured based on your fixture design.

Please use the configurator to build your own custom creation [Click here](#).

The following are the only compatible dimmers (not included)

1. 0-10V Wall dimmer - Crestron - CLW-DIMFLVEX-P-A-S

2. 0-10V interface and Module

- Lutron RF Dimming Module - LMJ-5T-DV-B

- Lutron Vive PowPak - RMJS-8T-DV-B

- Lutron GRX-TVM2

- Crestron DIN-A08

- Crestron GL-CAEN-2DIMFLV8


- Crestron CLX-2DIMFLV8

C. Other manufacturers

- Client must consult with manufacturers if Interface or Module provides Sourcing current.


3. Wireless 0-10V

Casambi - CBU-A2D

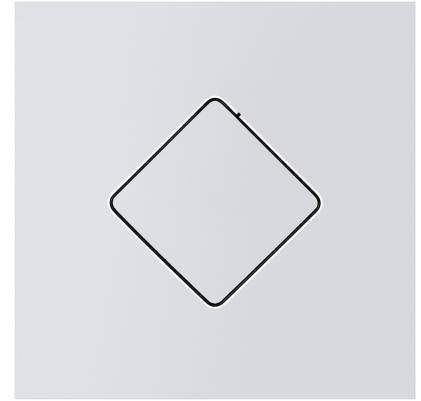

● F0409030 Black

Dimensional Image

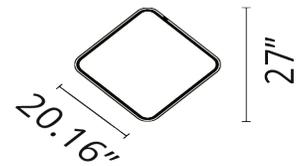

flex strip led 34w 3400lm 2700k cri90

Certifications



Electrical

Voltage 48VDC

IP Rating IP20

Physical

Cord Length (inches) 98.42"

Construction Material Aluminium, Silicone, Polycarbonate

Weight 1.48 lbs



FLOS

Arrangements Round Large - Specification Sheet

by Michael Anastassiades, 2017

Mounting	Suspension
Lamp (Bulb) Description	54W LED custom 2700K CRI90 2751lm delivered
Environment	Indoor - Dry Location
Dimming	Active 0-10V/DALI/Push Button
Finish	Black
Technical and Product Description	Arrangements is a modular system of geometric light elements that can be combined in different ways, creating multiple compositions into individual chandeliers. Each unit simply attaches onto the previous one as if resting, balancing perfectly as a part of a glowing chain.

Please note that the maximum power is 190 watts. You can choose any combination with the caveat that there can only be one 'line' or 'broken line' and when you attach it, it must go at the bottom.

The ceiling canopy is available in two sizes. The first size is Max 70 watts and the second is 190 watts. The appropriate canopy is automatically configured based on your fixture design.

Please use the configurator to build your own custom creation [Click here](#).

The following are the only compatible dimmers (not included)

1. 0-10V Wall dimmer - Crestron - CLW-DIMFLVEX-P-A-S

2. 0-10V interface and Module

- Lutron RF Dimming Module - LMJ-5T-DV-B

- Lutron Vive PowPak - RMJS-8T-DV-B

- Lutron GRX-TVM2

- Crestron DIN-A08

- Crestron GL-CAEN-2DIMFLV8


- Crestron CLX-2DIMFLV8

C. Other manufacturers

- Client must consult with manufacturers if Interface or Module provides Sourcing current.


3. Wireless 0-10V

Casambi - CBU-ADSR and LV004-12-UNV2D

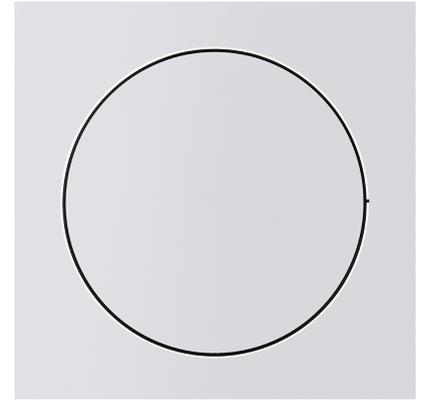

● F0408030 Black

Dimensional Image

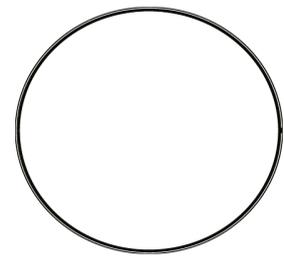

∅ 40.16"

Certifications



Electrical

Voltage 48VDC

IP Rating IP20

Physical

Cord Length (inches) 98.42"

Construction Material Aluminium, Silicone, Polycarbonate

Weight 2.65 lbs



FLOS

Arrangements Round Medium - Specification Sheet by Michael Anastassiades, 2017

Mounting	Suspension
Lamp (Bulb) Description	35W LED custom 2700K CRI90 1770lm delivered
Environment	Indoor - Dry Location
Dimming	Active 0-10V/DALI/Push Button
Finish	Black
Technical and Product Description	Arrangements is a modular system of geometric light elements that can be combined in different ways, creating multiple compositions into individual chandeliers. Each unit simply attaches onto the previous one as if resting, balancing perfectly as a part of a glowing chain.

Please note that the maximum power is 190 watts. You can choose any combination with the caveat that there can only be one 'line' or 'broken line' and when you attach it, it must go at the bottom.

The ceiling canopy is available in two sizes. The first size is Max 70 watts and the second is 190 watts. The appropriate canopy is automatically configured based on your fixture design.

Please use the configurator to build your own custom creation [Click here](#).

The following are the only compatible dimmers (not included)

1. 0-10V Wall dimmer - Crestron - CLW-DIMFLVEX-P-A-S

2. 0-10V interface and Module

- Lutron RF Dimming Module - LMJ-5T-DV-B

- Lutron Vive PowPak - RMJS-8T-DV-B

- Lutron GRX-TVM2

- Crestron DIN-A08

- Crestron GL-CAEN-2DIMFLV8


- Crestron CLX-2DIMFLV8

C. Other manufacturers

- Client must consult with manufacturers if Interface or Module provides Sourcing current.


3. Wireless 0-10V

Casambi - CBU-ADSR and LV004-12-UNV2D

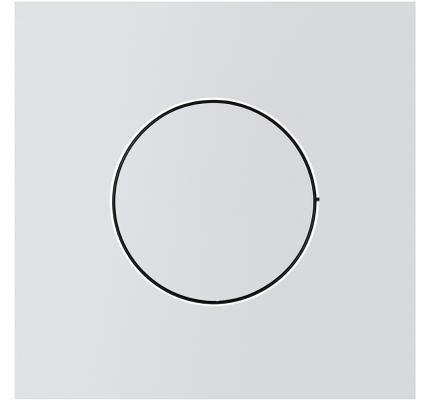

● F0407030 Black

Dimensional Image

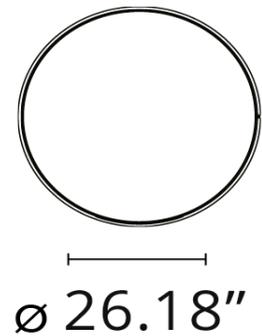

Certifications



Electrical

Voltage 48VDC

IP Rating IP20

Physical

Cord Length (inches) 98.42"

Construction Material Aluminium, Silicone, Polycarbonate

Weight 1.65 lbs



FLOS

Arrangements Round Small - Specification Sheet

by Michael Anastassiades, 2017

Mounting	Suspension
Lamp (Bulb) Description	21W LED custom 2700K CRI90 1068lm delivered
Environment	Indoor - Dry Location
Dimming	Active 0-10V/DALI/Push Button
Finish	Black
Technical and Product Description	Arrangements is a modular system of geometric light elements that can be combined in different ways, creating multiple compositions into individual chandeliers. Each unit simply attaches onto the previous one as if resting, balancing perfectly as a part of a glowing chain.

Please note that the maximum power is 190 watts. You can choose any combination with the caveat that there can only be one 'line' or 'broken line' and when you attach it, it must go at the bottom.

The ceiling canopy is available in two sizes. The first size is Max 70 watts and the second is 190 watts. The appropriate canopy is automatically configured based on your fixture design.

Please use the configurator to build your own custom creation [Click here](#).

The following are the only compatible dimmers (not included)

1. 0-10V Wall dimmer - Crestron - CLW-DIMFLVEX-P-A-S

2. 0-10V interface and Module

- Lutron RF Dimming Module - LMJ-5T-DV-B

- Lutron Vive PowPak - RMJS-8T-DV-B

- Lutron GRX-TVM2

- Crestron DIN-A08

- Crestron GL-CAEN-2DIMFLV8


- Crestron CLX-2DIMFLV8

C. Other manufacturers

- Client must consult with manufacturers if Interface or Module provides Sourcing current.


3. Wireless 0-10V

Casambi - CBU-ADSR and LV004-12-UNV2D

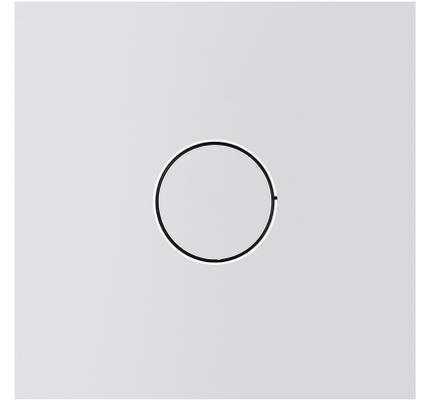

● F0406030 Black

Dimensional Image

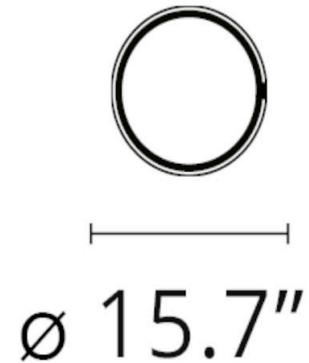

Certifications



Electrical

Voltage 48VDC

IP Rating IP20

Physical

Cord Length (inches) 98.42"

Construction Material Aluminium, Silicone, Polycarbonate

Weight 0.90 lbs

