

LOTUS COMFORT

Jasper Morrison

cappellini



Lotus Comfort is a complete collection of low and medium height armchairs available with or without armrests, with four or five legs, with or without wheels, and a rocking movement at variable heights. A new sledge base is introduced.

Materials used_

Structure:

Beech plywood

Padding:

1. Multi-density polyurethane foam, cover with fixed fabric, leather G or Extra G2

Base:

2. 4-5 spokes, in die-cast aluminium, swivel, tilting, adjustable height, metal rod sledge; finishing in polish chrome or matt lacquer white, mud, dark brown (RAL 8022).

Feet:


White plastic for chromed and white matt lacquer white
Base plastic for brown matt lacquered and mud base
Black plastic for sledge base

Casters:

Chromed carter, grey plastic caster suitable for semisoft surfaces carter matt lacquer white, mud or dark brown

Stitching:

Beige thread on dark fabric/leather
Brown thread on light fabric/leather

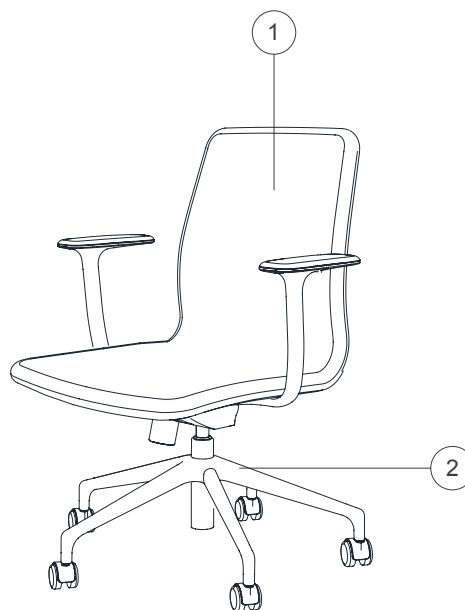

Dimensions_


LS_6



45,5/88,5
18"-34 3/4"

69 69
27 1/4" 27 1/4"

LS_6CB



45,5/88,5
18"-34 3/4"

69 69
27 1/4" 27 1/4"

LS_65



45,5/88,5 min 54,5/97,5 max
18"-34 3/4" min
21 1/2"-38 1/2" max

66 66
26" 26"

LS_65CB



45,5/88,5 min 54,5/97,5 max
18"-34 3/4" min
21 1/2"-38 1/2" max

66 66
26" 26"


LS_65CR



46,5/89,5 min 55,5/98,5 max
18 1/4"-35 1/4" min 21
3/4"-38 3/4" max

73 73
28 3/4" 28 3/4"


LS_65CBR



46,5/89,5 min 55,5/98,5 max
18 1/4"-35 1/4" min 21
3/4"-38 3/4" max

73 73
28 3/4" 28 3/4"


LS_6S



46/88,5
18"-34 3/4"

51 57,5
20" 22 3/4"

LS_6SCB



46/88,5
18"-34 3/4"

56 57,5
22" 22 3/4"


LS_7



45,5/103,5
18"-40 3/4"

69 69
27 1/4" 27 1/4"

LS_7CB

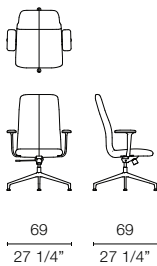

45,5/103,5
18"-40 3/4"

69 69
27 1/4" 27 1/4"


LS_75



45,5/103,5 min 54,5/112,5 max
18"-40 3/4" min
21 1/2"-44 1/4" max

66 66
26" 26"


LS_75CB



45,5/103,5 min 54,5/112,5 max
18"-40 3/4" min
21 1/2"-44 1/4" max

66 66
26" 26"


LS_75CR



46,5/104,5 min 55,5/113,5 max
18 1/4"-41 1/4" min
21 3/4"-44 3/4" max

73 73
28 3/4" 28 3/4"

LS_75CBR



46,5/104,5 min 55,5/113,5 max
18 1/4"-41 1/4" min
21 3/4"-44 3/4" max

73 73
28 3/4" 28 3/4"

